




STRIPNET

For envirogation (climatic influence),
strip irrigation and landscape

- Widest regulating range
- No moving parts
- Narrow and long wetted strip
- Acid resistant (AA) raw materials

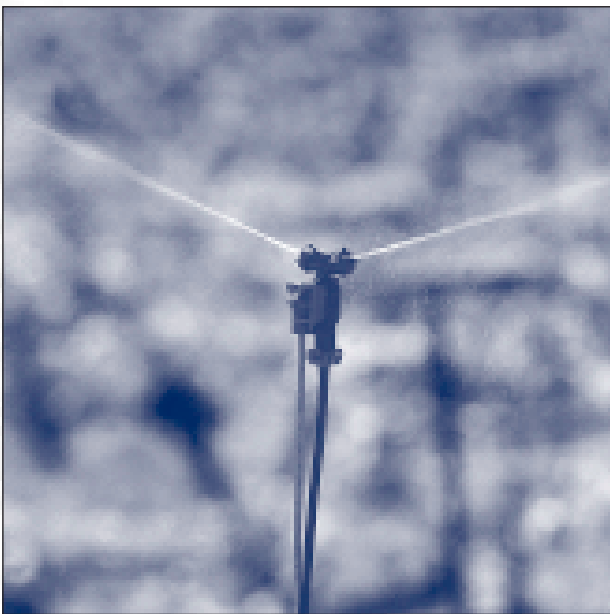

Flow vs. pressure performance

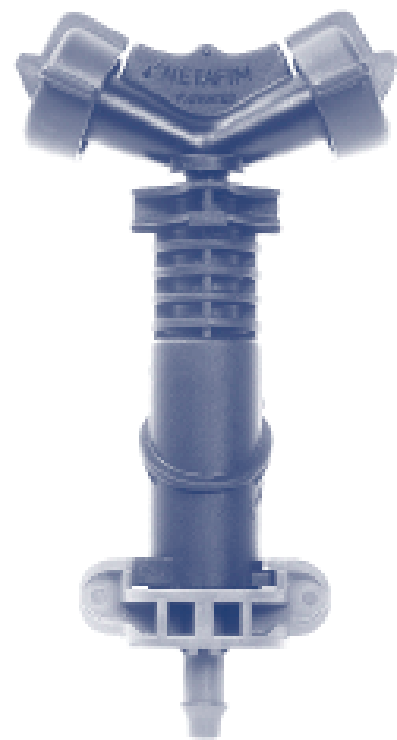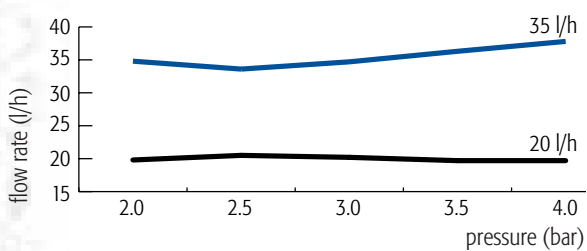

Barb connector



Self tapping connector for
4 mm Ø ID PE microtube



Press fit,
male connector



$\frac{3}{8}$ " & $\frac{1}{2}$ " threaded
connector

REGULATED MICRO-SPRINKLER

Working pressure: 2.0 - 4.5 bar

Filtration: 120 mesh

| Model | Code color | Nozzle size (mm) | Nom. flow (l/h) | Nozzle color | Wetted strip length (m)* | Wetted strip length (m)** |
|---------------------------|------------|------------------|-----------------|--------------|--------------------------|---------------------------|
| One active nozzle 020 | purple | 0.62 | 20 | blue + black | 5.25 | 5.50 |
| Two active nozzles 035 | sky blue | 0.62 | 35 | blue | 4.75 >< | 5.25 >< |

* 20 cm high above the crop. ** 70 cm high above the crop. >< Wetted strip on each side
The performance data has been recorded under ideal test conditions.
Sprinkler performance may be adversely affected by poor hydraulic entrance, riser tilt, **wind**, and other factors.

| 033 | Inlet connector | Dispersion deflector | Flow | Stand assembly * | Connector to lateral pipe |
|----------------------------|---|---|--|------------------|--|
| Barb 1 | w/o 0 | w/ 0.6 m micro-tube length 00 | w/o 0 | | w/o 0 |
| Self tapping ... 2 | "Y" body (2 open nozzles, 35 l/h flow) 7-035 | w/ 1.2 m micro-tube length 01 | Male/barb (2 parts) to PE 1 | | Male/3/8" conic (2 parts) to PVC 2 |
| Threaded 3/8" male 3 | "Y" body (1 open nozzle + 1 plugged, 20 l/h flow) 8-020 | w/ 1.5 m micro-tube length 02 | Connector barb/barb (1 part) to PE 8 | | |
| Threaded 1/2" male 4 | | w/ 1.8 m micro-tube length 03 | | | |
| Press fit, male .. 5 | | w/ special micro-tube length** 08 | | | |

* Standard tube: SPE 4*6.5 (black)
** Please, add required tube length in writing

| STRIPNET | Quantity | Dimensions (cm) | Weight (kg) |
|-------------------|----------|-----------------|-------------|
| Head only - box | 650 | 18x34x79 | 12.3 |
| Head only - palet | 13000 | 108x80x138 | 258.0 |

| Description | Catalog number |
|---|----------------|
| 1. Clamp for installation between wires (consisting of 2 plastic parts; a 6 mm, 60 cm-long galvanized stake; and 2 metal wires) | 64420-003800 |
| 2. Supernet stake | 63520-005900 |
| 3. Clamp for metal stakes | 64420-003000 |
| 4. Clamp for wood stakes | 64420-003100 |
| 5. Supernet stand adapter 6 mm | 63520-005950 |
| 5. Supernet stand adapter 8 mm | 63520-005970 |
| 6. Level (Auxiliaries for leveled clamp assembly) | 64420-003300 |

PERFORMANCE DATA

GUÍA DE PEDIDOS

PACKAGE DATA

ADAPTADORES